1. CONCRETE BLOCKING ON ALL TEES AND BENDS.

2. MJ BENDS WITH "MEGA-LUG" TYPE GLANDS.

3. MJ TEES WITH "MEGA-LUG" TYPE GLANDS OR "FOSTER ADAPTERS".

4. MJ GATE VALVES.

5. "FOSTER ADAPTERS".

6. "ROMA GRIP" RESTRAINED MJ/FLANGE COUPLING ADAPTERS.

7. FLANGE TYPE RISING STEM (OS & Y) GATE VALVES.

8a. "CONBRACO" OR "WATTS" DOUBLE CHECK VALVE.

8b. DOUBLE DETECTOR CHECK.

9. CONCRETE VAULT INSIDE DIMENSIONS 108"L x 72"W x 72"H WITH 3' x 3' ALUM. HATCH, 6" WALLS AND 6" TOP.

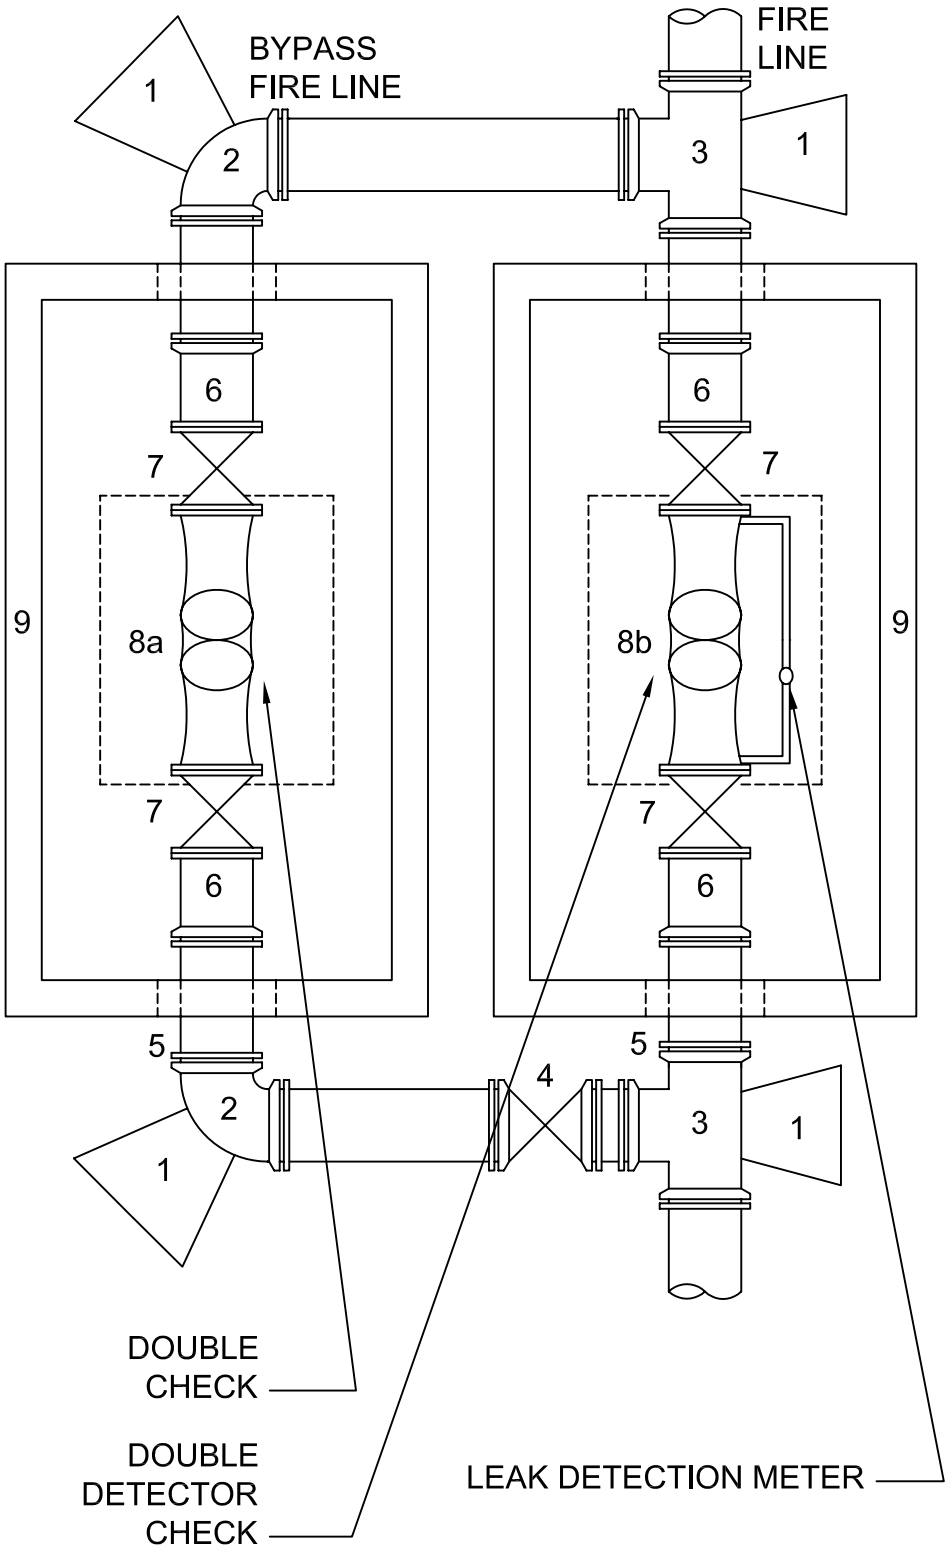

REVISIONS

City of Cumming

Department of Utilities - Distribution and Collection Division

FIRE LINE DOUBLE DETECTOR CHECK VALVE ASSEMBLY DETAIL FOR 6" AND 8"

W-71