


FOR TRAFFIC AREAS USE
STANDARD C.I. RING & COVER
EQUAL TO VULCAN 1480-1 OR
U.S. FOUNDRY 362.

FOR NON-TRAFFIC AREAS USE
LIGHT DUTY C.I. RINGS & COVER
EQUIPPED W/ 4" DROP HANDLE.
RING & COVER SHALL BE EQUAL
TO U.S. FOUNDRY 360-K.

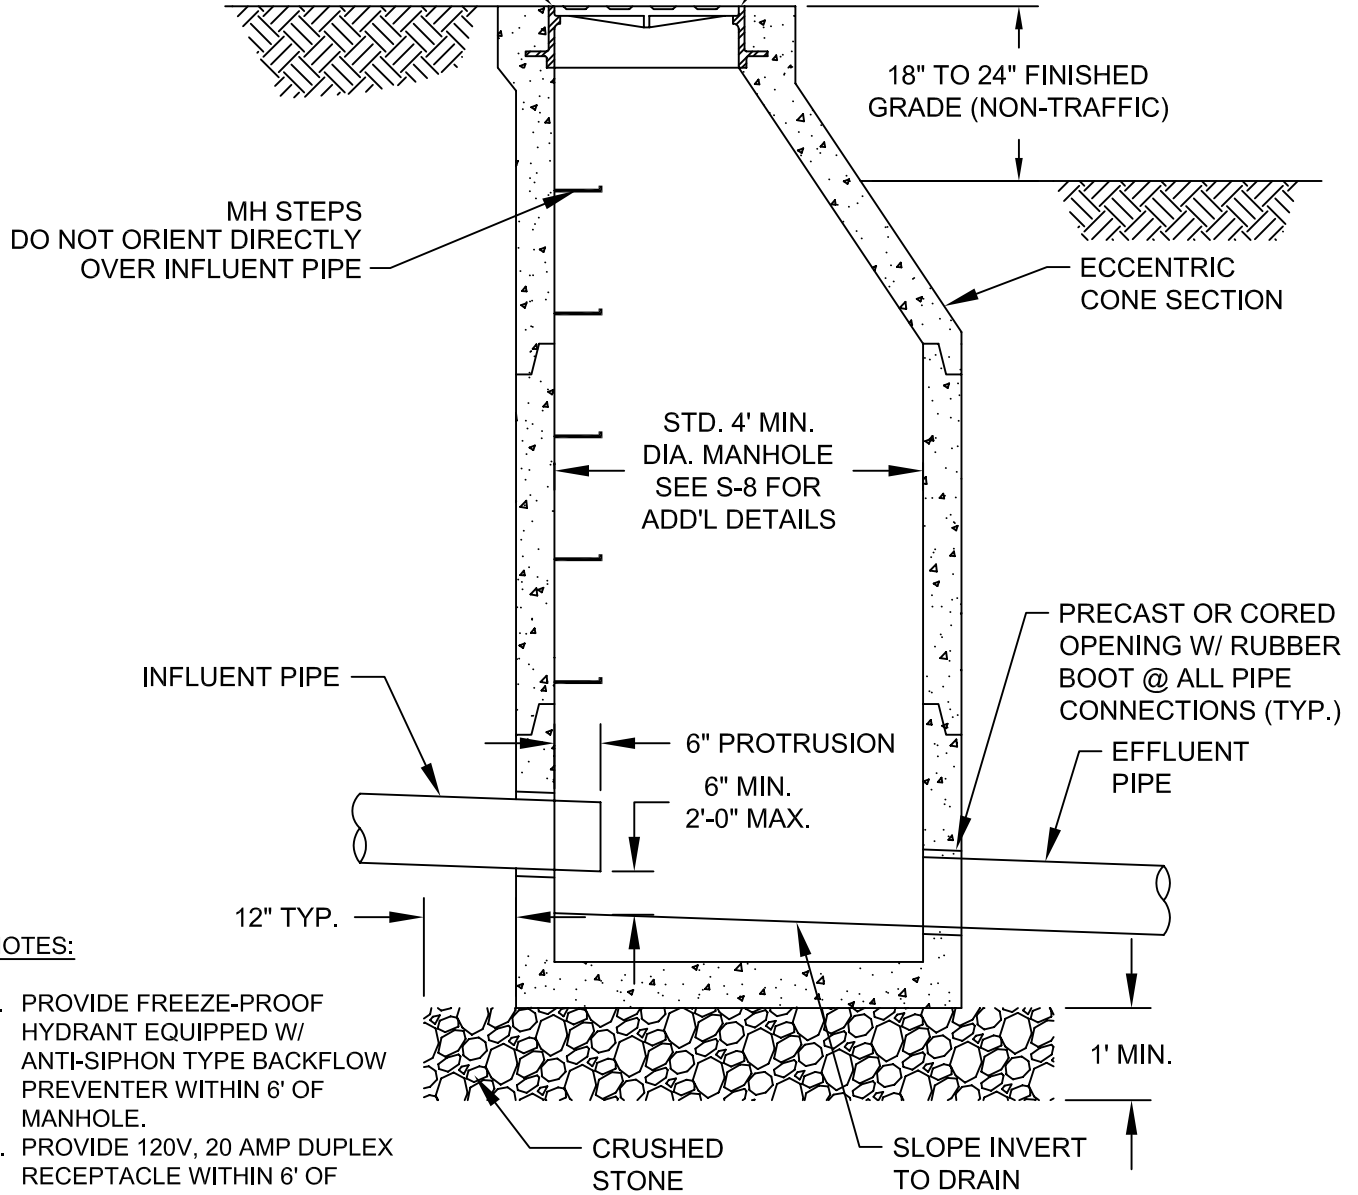

NOTES:

1. PROVIDE FREEZE-PROOF HYDRANT EQUIPPED W/ ANTI-SIPHON TYPE BACKFLOW PREVENTER WITHIN 6' OF MANHOLE.
2. PROVIDE 120V, 20 AMP DUPLEX RECEPTACLE WITHIN 6' OF MANHOLE
3. PROVIDE DUSK TO DAWN POLE MOUNTED OVERHEAD. LIGHT DIRECTLY OVER MANHOLE.
4. PROVIDE 8'x8'x6' HIGH CHAIN LINK FENCE WITH 3'-0" GATE.

REVISIONS

City of Cumming
Department of Utilities - Distribution and Collection Division



SAMPLE STATION MANHOLE

S-28