NOTES:

1. REQUIREMENTS FOR REINFORCED CONCRETE PAD AND TURN-AROUND MAY VARY BY SITE. VARIATIONS MUST BE APPROVED BY CITY.
2. YARD HYDRANT SHALL BE LOCATED INSIDE THE DUMPSTER STORAGE STRUCTURE TO PREVENT DAMAGE.
3. SEE S-31 FOR DETAILS.

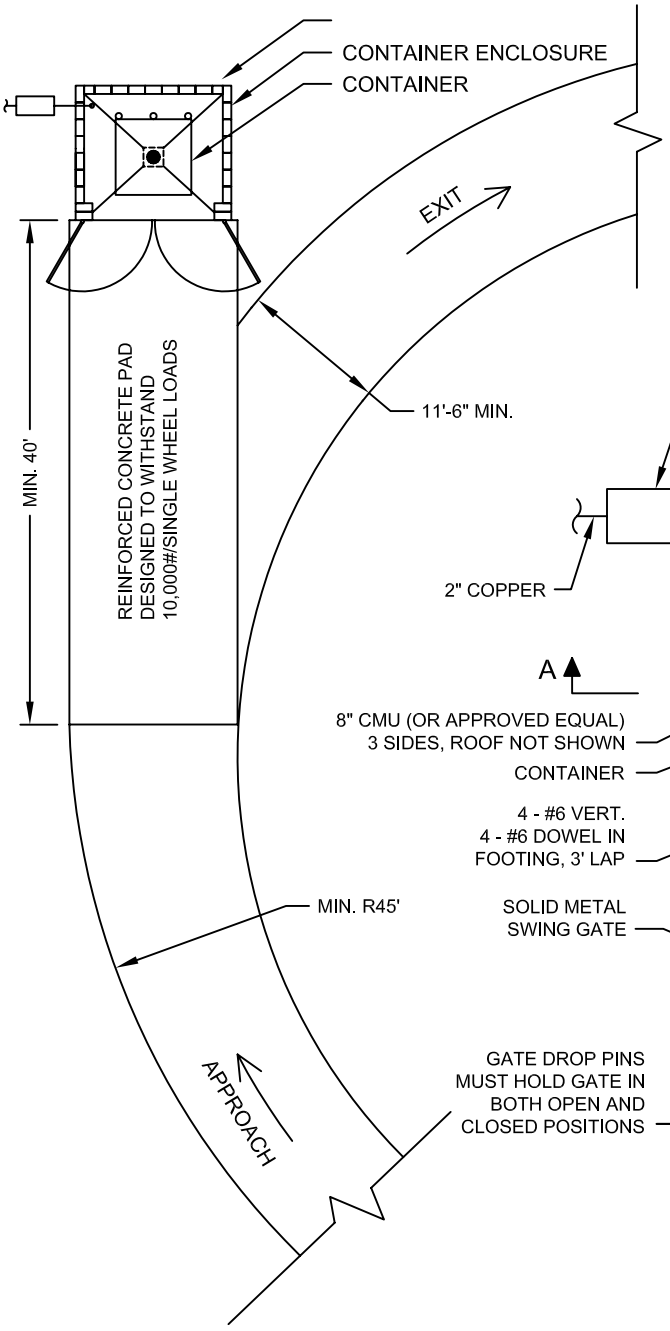

DUMPSTER ENCLOSURE AREA PLAN

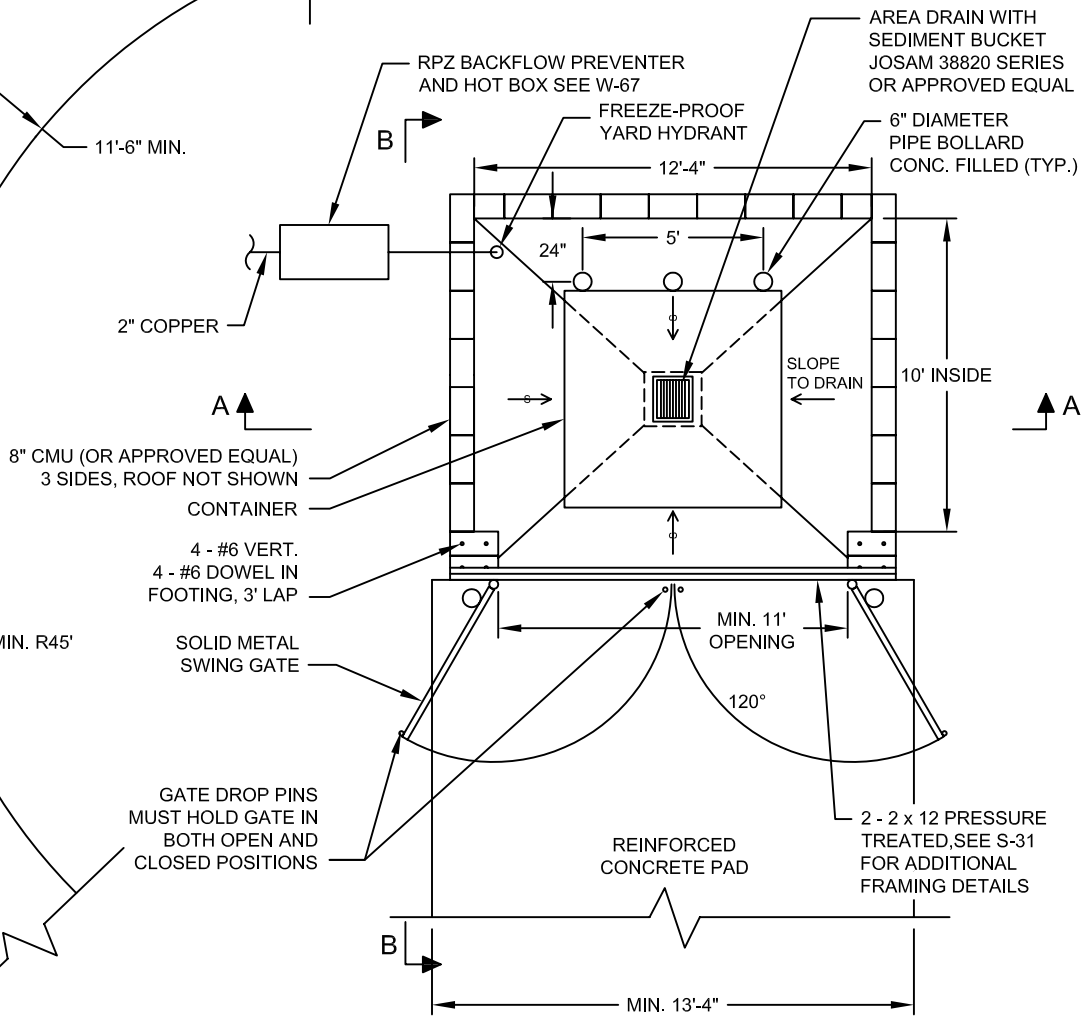

DUMPSTER ENCLOSURE PLAN

PAINT: INSIDE AND OUTSIDE TO MATCH SURROUNDING BUILDINGS. PAINT TO BE APPROVED BY CITY.

REVISIONS

City of Cumming

Department of Utilities - Distribution and Collection Division

DUMPSTER ENCLOSURE

N.T.S.

S-30